

CASELLA

63x series

Casella 63x Digital Sound Level Meter

With advanced functionality and simple user interface, the 63x range is designed to make occupational and environmental noise measurements quickly and easily.



www.casellasolutions.com

63xseries

Applications

Occupational Noise Measurement

- Workplace noise assessments according to ISO9612, OSHA 29CFR 1910.95
- Selection of hearing protection
- Calculation of noise exposure
- Ensuring compliance with workplace noise legislation

Environmental Noise Measurement

- Boundary noise assessments
- Noise nuisance complaints
- Measurements according to ISO1996, BS4142
- UK Construction Section 61 notices

Key Features

- Ideal for environmental or occupational monitoring
- Easy to use switch-on-and-go functionality
- Latest digital technology with a high resolution colour TFT display/LCD display
- Pre-configured set-ups for occupational and environmental measurements
- Voice notes to annotate measurements
- Audio (WAV) recording
- Single measurement range up to 140dB, no range adjustment required
- Data markers, back erase function and audio recording
- Level triggered events for transient measurements
- Real-time octave and 1/3 octave measurements
- Simultaneous measurement of all parameters with all frequency and time weightings
- Class 1 or Class 2 models available
- Removable pre-amp
- Environmental outdoor kit available
- Automatic calibration with Acoustic calibrator
- Internal Clock
- PCABS IP40

Occupational Noise Measurements

The CEL-630 Series is designed to make workplace noise measurements as quick and simple as possible. The displayed information can be made as simple or comprehensive as required and all measurement parameters are stored simultaneously, so no incorrect measurements can be made.

When the unit is calibrated with the CEL-120 calibrator, the calibration dates and times are stored and downloaded to Casella insight software, validating the accuracy of measurements.

Average, peak, and octave band measurements are performed at the same time, so only one measurement needs to be made for all workplace noise applications.

- Simultaneous measurements of all workplace noise parameters
- Standard set-ups for workplace noise legislation
- Measures parameters for hearing protection selection by the SNR, HML and octave band method
- Analyse time history of noise levels
- Optional high range microphone, up to 165dB



Lightweight with a bright colour display, the 63x makes workplace noise measurements easy


Simple User Interface...




Record voice notes to easily identify measurements



Simple icon based user interface

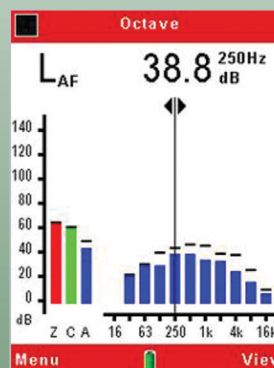

Octave measurements for the selection of PPE

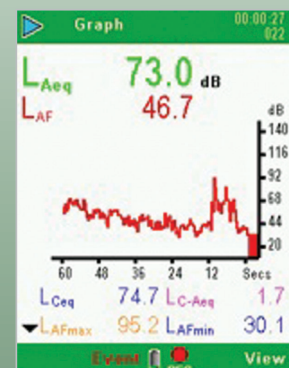

See the time history of noise levels

Environmental Noise Measurements

Data can be marked to signify any significant events, the data from which can be removed afterwards in insight software.

Up to 60 hours of audio files can be stored, commonly used for noise source identification. Stored audio can be played back on the instrument using headphones or downloaded to Casella insight software.

For unattended monitoring, event mode (CEL-633) allows trigger levels (dB) to be set, so additional data (e.g. L_{eq} , L_{max}) is stored together with the audio file for later play back or analysis, as well as a profile down to 10ms intervals.


An environmental noise monitoring kit is available which protects the instrument and microphone from the weather and allows unattended monitoring for up to 10 days.

- Simultaneous broadband and frequency measurement
- Data markers
- Back erase function
- Real-time frequency analysis
- Single measurement range
- Triggered 'event' capture
- Standard soft kit case



A dedicated environmental kit is available


POW1 available - Rechargeable external battery pack for use for more than 24 hours

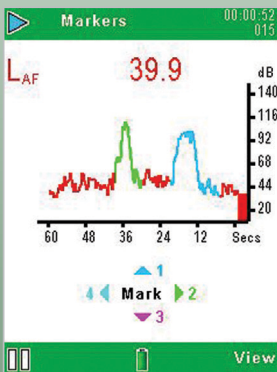


Significant noise events can be marked



Listen to audio files from the 63X Series with headphones

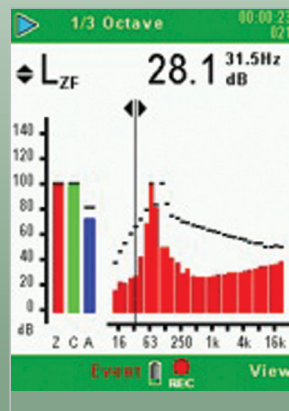

Realtime frequency analysis and single measurement range

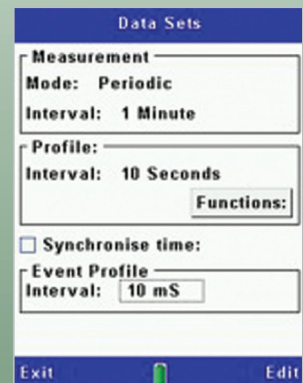

Set 2 levels of time history storage

63x Series Model Selection

Model Functionality

There are 2 models available, please see the model selection table below for the one you require (e.g. CEL-632). Then select your frequency analysis requirements by adding 'A' for broadband, 'B' adds octave band and 'C' adds 1/3 octave e.g.

CEL-632C. C denotes Class1 and C2 denotes Class2. Class1 comes with microphone: CEL-251 and Class2 comes with microphone: CEL-252.

| 63xseries | 632 | 633 |
|--------------------------|-----|-----|
| Cumulative Results | ● | ● |
| Period Results | ● | ● |
| Profile Results | ● | ● |
| Statistical Values (Ln%) | | ● |
| Audio Voice Notes | ● | ● |
| Marker Events | ● | ● |
| Level Events | | ● |
| External Events | ● | ● |






Management Software

Casella Insight data management software is a powerful yet simple tool to download, analyse and report from either workplace or environmental noise data.

- Analysis of noise level time history
- Replay voice notes and event audio
- Intuitive user interface
- Remove anomalous data from results
- Analysis of time history
- Generate comprehensive reports
- Store data by, person, place, location
- Manage multiple instruments and calibration

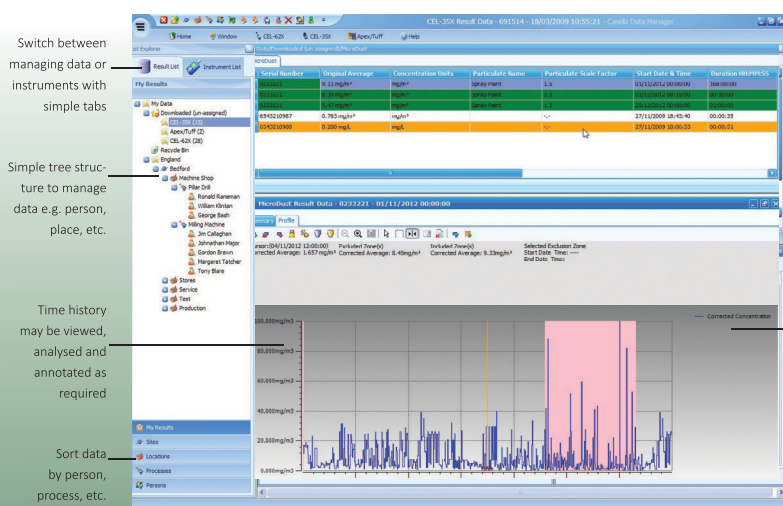

Switch between managing data or instruments with simple tabs

Simple tree structure to manage data e.g. person, place, etc.

Time history may be viewed, analysed and annotated as required

Sort data by person, process, etc.

Multiple parameters can be displayed and sorted simultaneously

Data can be dragged and dropped to the tree structure as required

Data may be graphed and copied to other applications

For more detail on Casella Insight Data Management Software, please visit the 'Products' section of casellasolutions.com

Technical Specification

Standards: IEC61672: 2013 Class 1 and 2, ANSI S1.4: Type 1 and 2 1983 (R2006), IS 15575
 Filters: IEC61260: Class 0, ANSI S1.43: (1996)
 Note: IEC61672 replaces 2 obsolete standards, IEC60651 and IEC60804

Certification: PTB, CE and Calibrated by NPL India

General

Microphone: 1/2" Pre-polarised Electret / Condenser
 Measurement range: 20-140dB RMS (143.3dB peak)
 Total Noise floor: 19dB(A) Class 1, 25dB(A) Class 2
 Time weightings: Fast, Slow, Impulse and Peak simultaneously
 Frequency weightings: A, C and Z simultaneously
 Frequency bands: 1/1 Octave and 1/3 Octave
 Frequency range: 6Hz to 20KHz

Amplitude weighting (Q): 3, 4 and 5 simultaneously

Back erase: Last 10s in cumulative mode (all models)
 Timers: Duration 1s-24h,
 On/Off timers: 6 sets with selectable times and a repeat function
 GPS (optional): In Built

Physical

Tripod mount: ¼" Whitworth socket
 Batteries: 3x AA rechargeable, 18 hours dependant on backlight
 More than 24 hours with external pack (POW1)
 External power: 9-14V DC at 150mA
 Weight: 270g without batteries
 Size: 230x72x31mm inc preamp and microphone
 Resolution: 0.1dB

Memory

Memory: 2/4/8GB SD memory card (>1 year logging when set to 1 second interval, 999 runs). All parameters stored and accessible via Casella insight. Total measurement runs: 999. Events: 999 events/run. 10 hours of audio recording in high quality mode, 60 hours in low quality mode. For long term unattended monitoring the CEL-630 takes a new run daily for up to a total of 400 days.

Printer specifications

Made in India & Optional

- (i) BIS approved High Speed latest microprocessor based
- Portable dot matrix / Thermal Printer
- (ii) Semi-Automatic paper loading Technology
- (iii) 2-2.5 lines per second printing speed
- (iv) Interface: 1. USB 2. Bluetooth optional
- (v) Weight: less than 400g (excluding printer paper roll)
- (vi) Alpha numeric keypad option available

Measured Parameters

Broadband: L_{XY} , L_{Xmax} , L_{Xmin} , L_{Xeq} , L_{Xpeak} , L_{avg} , LC-LA, L_{Xeq} , L_{TMS} , L_{TMS} , L_{AE} .
 Workplace dose values are calculated within insight software.

Octaves and ½ octaves: L_{XY} , L_{Xeq} , L_{Xmax} , 5x Ln% (on CEL-633). Where X is the frequency weighting A, C or Z and Y represents time weighting Fast (F), Slow (S) or Impulse (I). All weightings simultaneously measured where appropriate.

CEL-633 model additionally stores 5x L_n values in broadband and octave modes. For time history data, all parameters are logged for period times plus 6 selectable profile parameters (plus 5x L_n values on CEL-633).

Audio Recording

Low Quality: 8,000 samples/s @ 8bit (64kb/s), up to 4kHz
 High Quality: 24,000 samples/s @ 8 bit (192kb/s), up to 12kHz

Environmental

Operating up to 95%RH in the absence of condensation
 Conditions: Temperature of -10 to +50°C (Class 1) and 0 to 40°C (Class 2) Atmospheric pressure of 65 to 108kPa.

Storage: -20 to 60°C

Languages

User interface can be changed via the menu: English, French, German, Spanish, Italian, Portuguese, Chinese.

Kits

Kits can be tailor made which include kit case, sound level meter, microphone extension cable, acoustic calibrator, windshield, tripod, dot matrix / thermal printer, cables, insight software and calibration certificates, user manual.

Casella India, IDEAL Industries India Pvt.Ltd,
 Haryana, India
 Tel: +91 124 4495104
 Email: casella.sales@ideal-industries.in

Casella UK, Regent House, Wolseley Road,
 Kempston, Bedford, UK, MK42 7JY
 Tel: +44 (0)1234 844100
 Email: info@casellasolutions.com

Casella reserves the right to amend the specification without notice