
# Compact flow sensor for compressed air and gases

# VA 526

Ready for the digital future

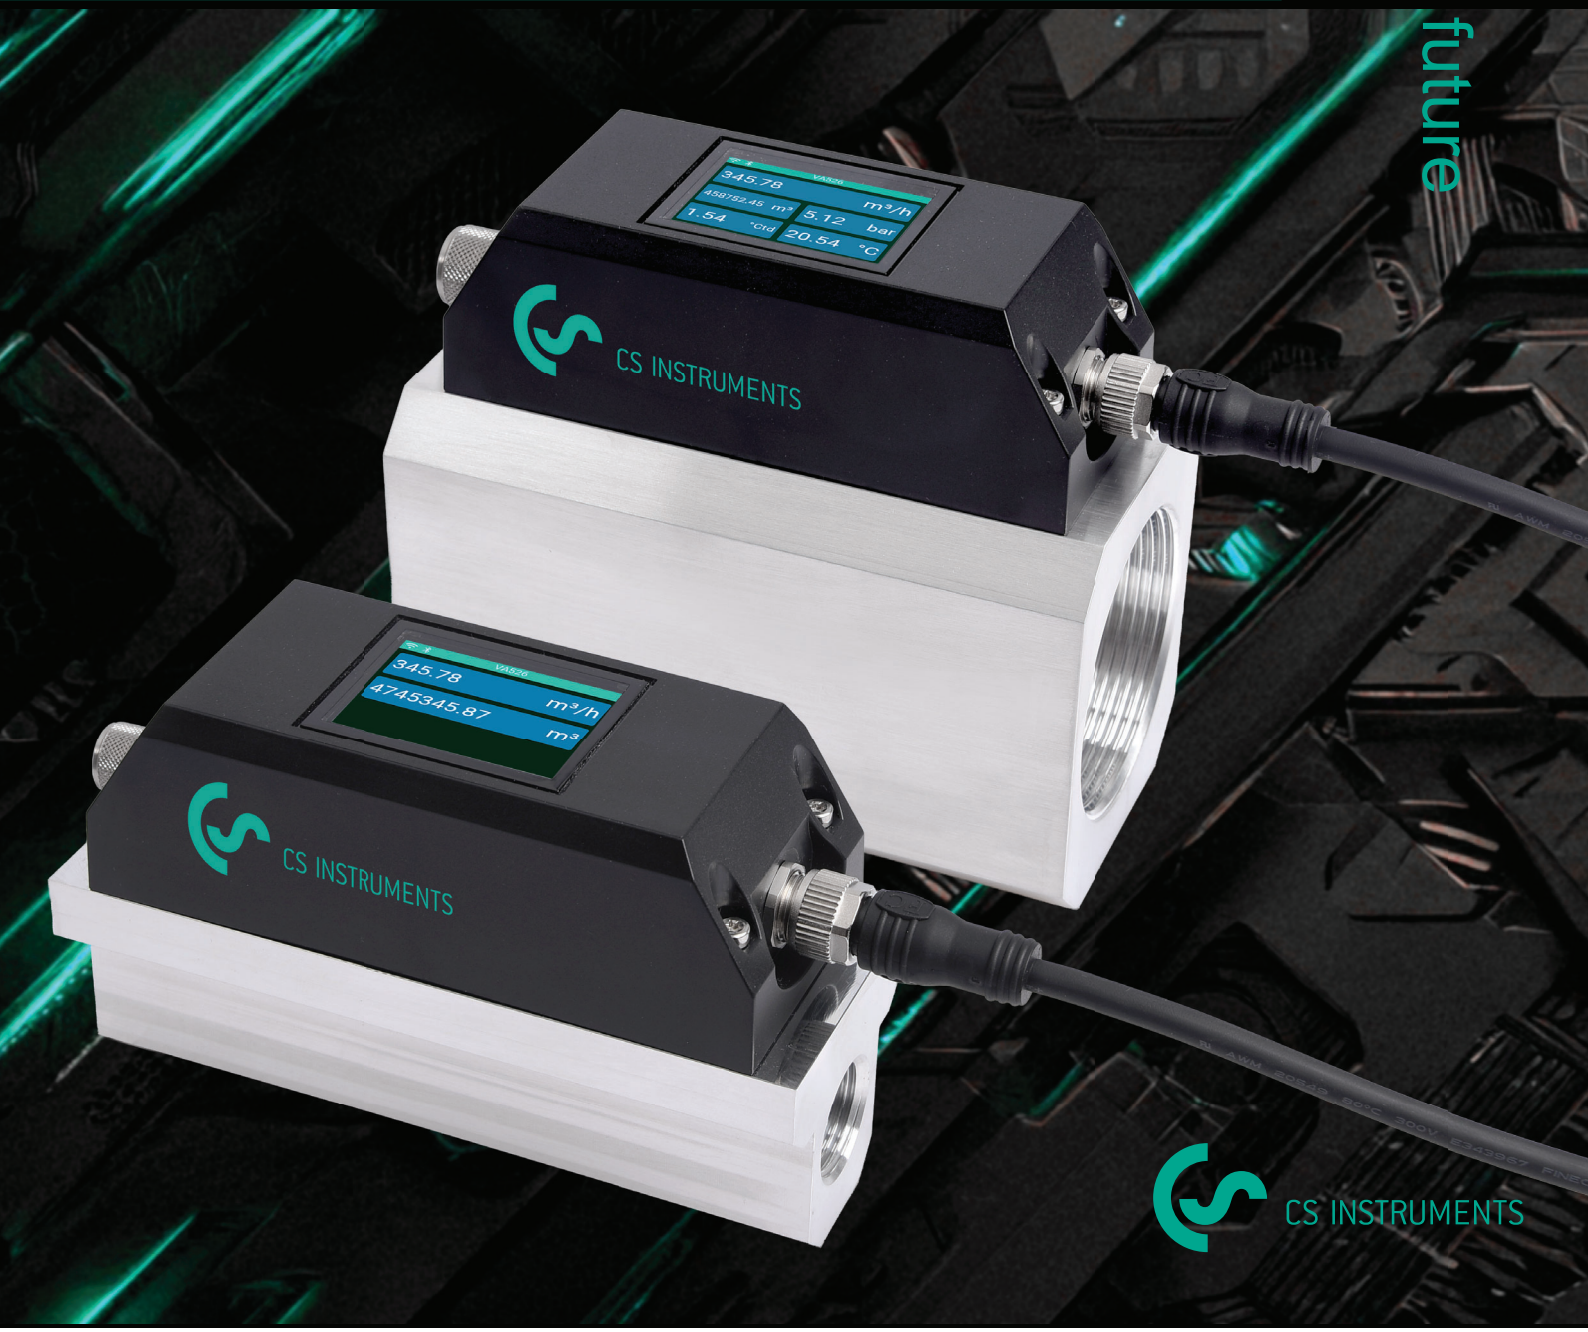


# COMPACT.
# CONNECTED.
# FUTURE-PROOF.

The VA 526 combines precise flow measurement, consumption monitoring, temperature measurement and, optionally, pressure and humidity/dew point monitoring in a compact inline sensor.

It thus offers a space-saving complete solution for monitoring compressed air and gas consumers directly at the point of use.

Thanks to modern interfaces such as Modbus-RTU, Ethernet/PoE, IO-Link and Bluetooth, the VA 526 can be flexibly integrated into existing energy monitoring systems.

Operation, parameterisation and evaluation are conveniently carried out via the CS SensorApp – ideal for hard-to-reach measurement points and decentralised plant structures.

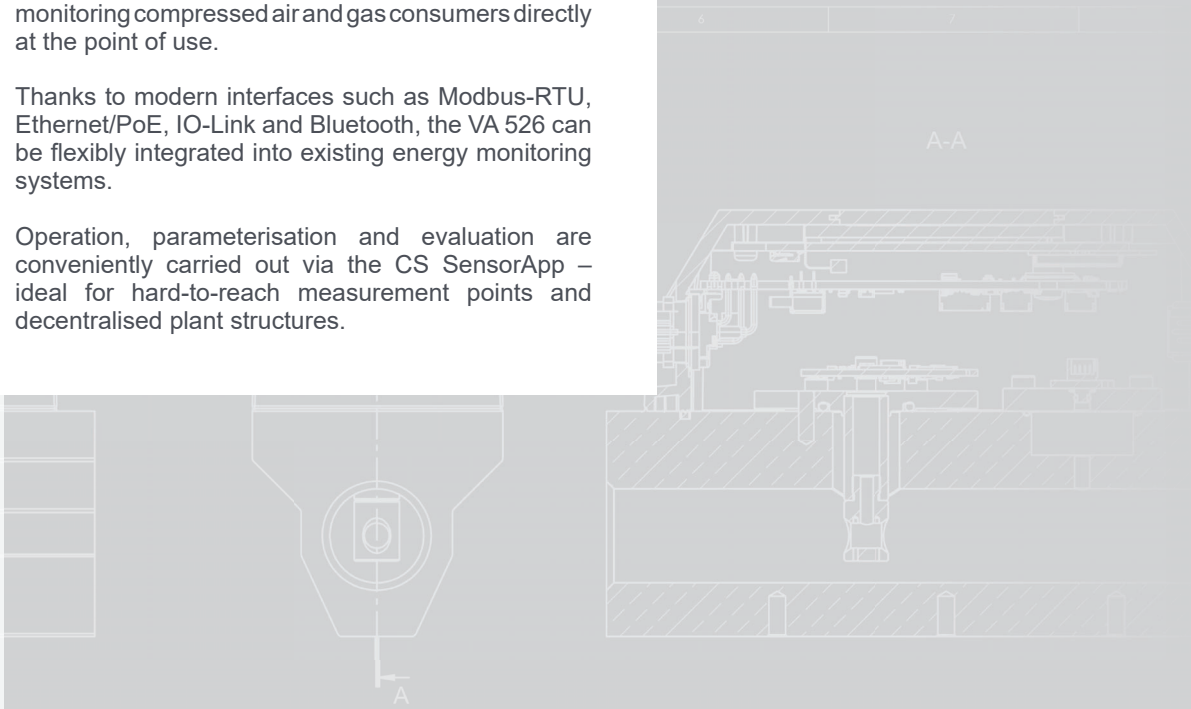

# CONTENTS


| | |
|---|---|
| FEATURES | 4-5 |
| CS SensorApp | 6-7 |
| ORDER CODES / TECHNICAL SPECIFICATIONS | 8 |
| DIMENSIONS / MEASURING RANGES TABLE | 9 |
| MEASURING RANGE LIMIT VALUES | 10 |
| NEW PRODUCTS | 11 |


The VA 526 has been developed for modern compressed air and gas networks, where transparency, energy efficiency and easy integration are becoming increasingly important.

On the following pages, you will find the key features, interfaces, applications and technical specifications of the compact inline flow sensor.

# VA 526

## Compact inline flow sensor for compressed air and gases




**4 values at a glance**

- Consumption measurement
- Dew point measurement
- Pressure measurement
- Temperature measurement

### Optionally available with flow rectifier, pressure sensor and humidity/dew point monitoring

The newly developed VA 526 combines modern digital interfaces for connection to energy monitoring systems with a small, compact design. The VA 526 is used whenever a large number of machines (compressed air or gas consumers) are to be integrated into an energy monitoring network.

### Advantages at a glance:

- **Bluetooth** as standard
- **Compact design** – for use in machines or behind the maintenance unit at the end user
- Classic **analogue signals** (4…20 mA) or digital interfaces such as Modbus-RTU, Ethernet (including PoE), M-Bus or IO-Link
- Optional: No run-in sections required, thanks to integrated **flow straightener**
- Optional: **Pressure and dew point measurement** for comprehensive monitoring
- CS SensorApp for easy operation, parameter setting, viewing of measured values, and online service support on site

### Applications:

- Consumption analysis directly at the end user (point of use)
- Consumption billing in accordance with ISO 50001
- Reducing costs by minimising leaks
- Compact OEM integration without the need for inlet sections
- Efficiency monitoring of nitrogen or oxygen generators

## Robust measuring tips



Unlike standard flow sensors on the market, the sensor element is installed in the centre of the flow within a stainless steel tube fitted with baffles.


Baffles protect the sensor element from mechanical stress caused by dirt and particles.

The sensor element is extremely stable over the long term and is protected from moisture and condensation by a glass coating.

In most cases, compressed air is not free of oil, condensate, dirt and particles. Consumption meters currently available on the market cannot usually be cleaned and are replaced when contaminated.


The robust measuring tips can be cleaned with water and a non-aggressive cleaning agent.

## Various pipe cross-sections available

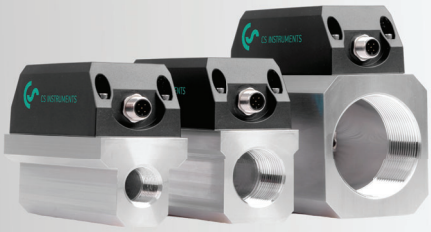

The VA 526 is available for all standard pipe sizes from 1/4” to 2” with G or NPT threads.

## Optional flow straightener

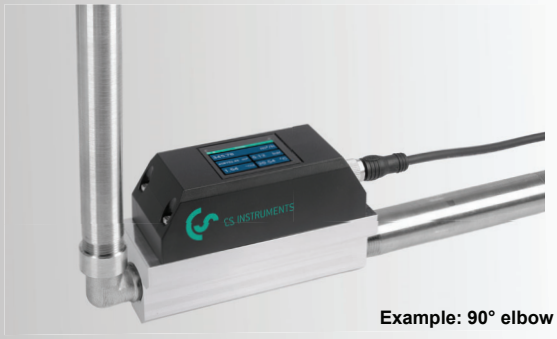


**Example: 90° elbow**

The integrated flow straightener ensures a defined and stable flow profile immediately at the measurement point, thereby minimising measurement errors caused by turbulence or swirl as far as possible.


This flow stabilisation significantly reduces the required inlet and outlet runs, enabling space-saving installation even in compact systems.

This guarantees consistently high reproducibility of the measured values, regardless of the upstream piping configuration.



**Integrated flow straightener – no inlet sections required**

**Ready for the digital future:**
**Full compliance with the EU Cyber Resilience Act (CRA) – already implemented as standard today**





IO-Link Modbus TCP/IP


# CS SensorApp


- The free CS SensorApp quickly and easily detects all VA 526 units nearby
- The sensors are configured via your mobile device
- Available for iOS and Android devices – App Store (Apple) or Play Store (Android)
- Live measurement data, sensor settings and parameterisation
- Easy access via the CS SensorApp to hard-to-reach sensors
- User-friendly and intuitive operation









## VA 526 – Display configuration








- Select your most important display values (e.g. in m³/h, m³, l/min, °C/°F, etc.)
- Easily change units via the app
- Software-controlled display rotation – perfect readability in any installation position

## App / Sensor configuration

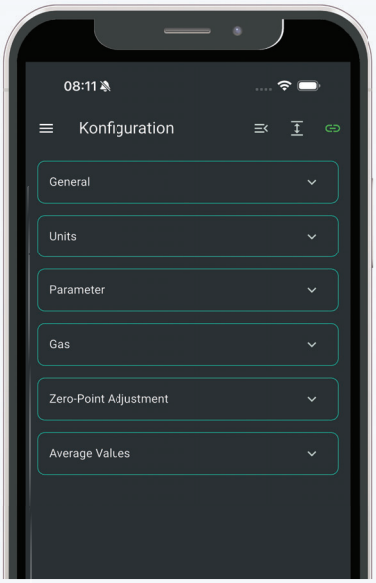


**Configuring of sensor settings**

Name the measuring point, reset the meter reading, change units, set gas type, zero point adjustment, settings for average value calculation.


## App / Current readings




**Everything you need at a glance**

Current readings, serial numbers and calibration dates are clearly displayed.

## App / Current readings and graphs

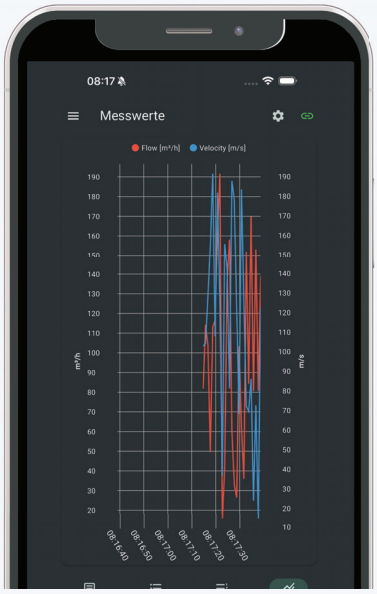



**Live readings and data analysis**

Current readings can be accessed in real time and visualised as coloured measurement curves.

Essential functions such as zooming, selecting/ deselecting individual measurement curves, free selection of time periods, axis scaling, colour selection, etc. are integrated.


## App / Consumption and Leakage Analysis

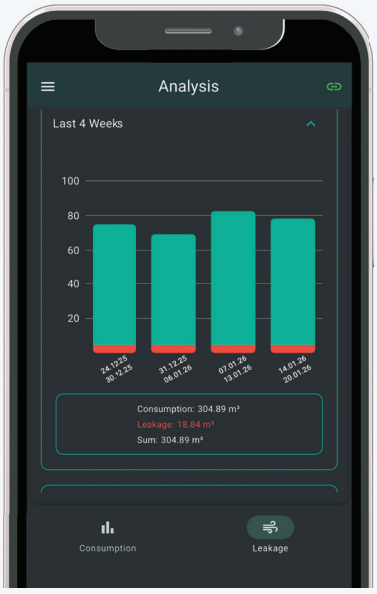


**Exportable as a CSV or PDF file**

Analysis of consumption and leakage profiles for the last 2 years (measured at 10-minute intervals) thanks to internal ring buffer.

## App / Remote access via TeamViewer

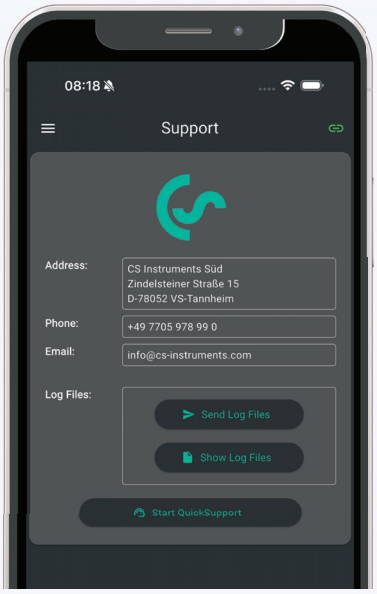


**Support - Help**

By clicking on “Start Quick Support”, you allow one of our service engineers to contact you directly and assist you with your enquiry.

# VA 526 - Inline flow sensor

Example order code VA 526:

0695 5260_A1_B1_C1_D1_E1_F1_G1_H1_I1_J1_K1_L1_M1_N1_R1

| Measuring section | |
|---|---|
| A1 | 1/4" |
| A2 | 3/8“ |
| A3 | 1/2“ |
| A4 | 3/4“ |
| A5 | 1“ |
| A6 | 1 1/4“ |
| A7 | 1 1/2“ |
| A8 | 2" |

| Threaded version | |
|---|---|
| B1 | G-female thread |
| B2 | NPT-female thread |

| Material type | |
|---|---|
| C1 | Aluminium |
| C2 | Stainless steel 316 L |

| Adjustment/calibration | |
|---|---|
| D1 | No real gas adjustment |
| D2 | Real gas adjustment |

| Gas type | |
|---|---|
| E1 | Compressed air |
| E2 | Nitrogen (N2) |
| E3 | Argon (Ar) |
| E4 | Carbon dioxide (CO2) |
| E5 | Oxygen (O2) |
| E6 | Nitrous oxide (N2O) |
| E90 | Other gases available on request |

| Measuring range (see table) | |
|---|---|
| F1 | Max version (185 m/s) |
| F2 | Low-speed version (50 m/s) |
| F3 | Standard version (92,7 m/s) |
| F4 | High-speed version (224 m/s) |

| Reference standard | |
|---|---|
| G1 | 20 °C, 1000 mbar |
| G2 | 0 °C, 1013,25 mbar |
| G3 | 15 °C, 981 mbar |
| G4 | 15 °C, 1013,25 mbar |

| Humidity measurement option | |
|---|---|
| H1 | without humidity measurement |
| H2 | with humidity measurement (-20...+50 °Ctd.) |

| Pressure measurement option | |
|---|---|
| I1 | without a pressure sensor |
| I2 | with integrated pressure sensor 0…16 bar |
| I3 | with integrated pressure sensor10…2000 mbar (abs.) |
| I4 | with integrated pressure sensor 0…40 bar |

| Signal output/bus connection option | |
|---|---|
| J1 | 1x 4…20 mA, RS485 (Modbus-RTU) |
| J2 | 1x 4...20 mA, IO-Link |
| J3 | Ethernet interface PoE (Modbus/TCP), 1 x 4…20 mA, RS485 (Modbus-RTU) |

| Flow Straightener | |
|---|---|
| K1 | without flow straightener |
| K2 | with a single-phase flow straightener |

| Accuracy class | |
|---|---|
| L1 | ± 1.5% of m.v. ± 0.3% of f.s. |
| L2 | ± 6% of m.v. ± 0.5% of f.s. |
| L3 | ± 1% of m.v. ± 0.3% of f.s. |

| Maximum pressure | |
|---|---|
| M1 | 16 Bar |
| M2 | 40 bar (not available with NPT threads > 1“), (only with C2) |

| Surface condition | |
|---|---|
| N1 | Standard version |
| N2 | special cleaning, oil- and grease-free (e.g. for oxygen applications) |
| N3 | Silicone-free version, including special oil- and grease-free cleaning |


| Special measurement range | |
|---|---|
| R1 | On request |

**Order no. VA 526**

| DESCRIPTION | ORDER NO. |
|---|---|
| Compact inline flow sensor for compressed air and gases | 0695 5260 + Order code A_…R_ |

| TECHNICAL DATA VA 526 | |
|---|---|
| **Parameters:** | m³/h, l/min (1000 mbar, 20 °C) for compressed air, or Nm³/h, Nl/min (1013 mbar, 0 °C) for gases |
| **Units can be set via the SensorApp:** | m³/h, m³/min, l/min, l/s, ft/min, cfm, m/s, kg/h, kg/min, g/s, lb/min, lb/h |
| **Sensor:** | Thermal mass flow sensor |
| **Measured medium:** | Air, gases |
| **Measuring range:** | See table |
| **Accuracy:**<br>**(o. M. V. = of measured value)**<br>**(o. F. S. = of full scale)** | ± 1.5% of m.v. ± 0.3% of f.s.<br>on request:<br>± 1% of m.v. ± 0.3% of f.s. or<br>± 6% of m.v. ± 0.5% of f.s. |
| **Accuracy pressure measurement:** | + 1% m.v. |
| **Operating temperature:** | -20…80 °C |
| **Operating pressure:** | Up to 16 bar, optionally up to 40 bar |
| **Digital output:** | RS 485 interface (Modbus RTU), M-Bus (optional), Ethernet interface or PoE, IO-Link, Bluetooth |
| **Analogue output:** | 4…20 mA for m³/h or l/min |
| **Supply:** | 18…36 VDC, 5 W |
| **Burden:** | < 500 Ω |
| **Housing:** | Polycarbonate (IP 65) |
| **Measuring block:** | Aluminium, 316 L |
| **Connection threads on the measuring blocks:** | G 1/4″ to G 2″ (BSP – British Standard Pipe) or 1/4″ to 2″ NPT threads |
| **Installation position:** | any |
| **Data logger:** | Memory: 50 MB<br>Example: Measurement interval 10 mins<br>Memory capacity for 2 years |

# VA 526 Dimensions:

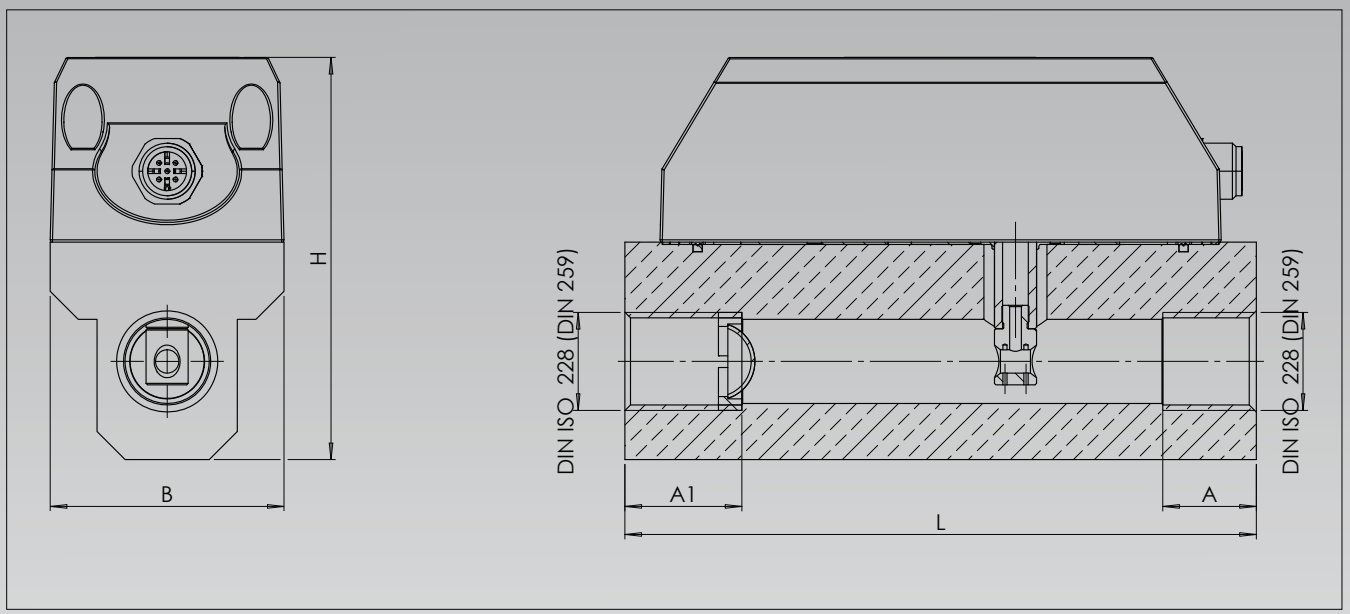


| **Flow measurement ranges for the VA 526 (Max version 185 m/s) for compressed air (ISO 1217: 1000 mbar, 20 °C)<br>For measurement ranges for other gases, see pages xx to xx** | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| **Measurement section** | **Thread** | **Measuring range full scales** | | **L** | **B** | **H** | **A1** | **A** |
| | | m³/h | cfm | mm | mm | mm | mm | mm |
| DN 8 | G 1/4″ | 105 l/min | 3,6 | 135 | 50 | 86 | 15 | 15 |
| DN 10 | G 3 /8″ | 50 m³/h | 29,4 | 135 | 50 | 86 | 15 | 15 |
| DN 15 | G 1/2″ | 90 m³/h | 50 | 135 | 50 | 86 | 25 | 20 |
| DN 20 | G 3/4″ | 170 m³/h | 100 | 135 | 50 | 90 | 26 | 20 |
| DN 25 | G 1″ | 290 m³/h | 170 | 135 | 50 | 90 | 29 | 25 |
| DN 32 | G 1 1/4″ | 530 m³/h | 310 | 135 | 70 | 120 | 35 | 30 |
| DN 40 | G 1 1/2″ | 730 m³/h | 430 | 135 | 70 | 120 | 36 | 25 |
| DN 50 | G 2″ | 1195 m³/h | 700 | 135 | 70 | 120 | 44 | 30 |

# Measuring range

| | | 1/4“ | 3/8“ | 1/2" | 3/4" | 1" | 1 ¼" | 1 ½" | 2" |
|---|---|---|---|---|---|---|---|---|---|
| | | l/min (cfm) | m³/h (cfm) | m³/h (cfm) | m³/h (cfm) | m³/h (cfm) | m³/h (cfm) | m³/h (cfm) | m³/h (cfm) |
| **Referenzbedingungen DIN 1945 / ISO 1217: 20 °C, 1000 mbar** | | | | | | | | | |
| **Air** | Low-Speed (50 m/s) | 25 (0,9) | 225 Nl/min (8) | 20 (14) | 45 (25) | 75 (45) | 140 (80) | 195 (115) | 320 (190) |
| | Standard (92,7 m/s) | 50 (1,8) | 25 (14,7) | 45 (25) | 85 (50) | 145 (85) | 265 (155) | 365 (215) | 600 (350) |
| | Max (185 m/s) | 105 (3,6) | 50 (29,4) | 90 (50) | 175 (100) | 290 (170) | 530 (310) | 730 (430) | 1195 (700) |
| | High -Speed (224 m/s) | 130 (4,5) | 60 (35,3) | 110(60) | 215 (125) | 355 (210) | 640 (375) | 885 (520) | 1450 (850) |
| **Setting to DIN 1343: 0 °C, 1013.25 mbar** | | | | | | | | | |
| **Argon (Ar)** | Low-Speed (50 m/s) | 45 (1,5) | 330 Nl/min (11,7) | 35 (20) | 75 (40) | 120 (70) | 220 (130) | 305 (180) | 505 (295) |
| | Standard (92,7 m/s) | 85 (3) | 35 (20,5) | 70 (40) | 135 (80) | 230 (135) | 415 (245) | 570 (335) | 935 (550) |
| | Max (185 m/s) | 170 (6) | 75 (44,1) | 140 (80) | 275 (160) | 460 (270) | 830 (485) | 1140 (670) | 1870 (1100) |
| | High-Speed (224 m/s) | 205 (7,2) | 95 (55,9) | 170 (100) | 335 (195) | 555 (325) | 1005 (590) | 1385 (815) | 2265 (1330) |
| | | | | | | | | | |
| **Carbondi-oxide (CO2)** | Low-Speed (50 m/s) | 25 (0,9) | 225 Nl/min (7,9) | 20 (14) | 45 (25) | 75 (45) | 140 (80) | 195 (115) | 320 (185) |
| | Standard (92,7 m/s) | 50 (1,8) | 25 (14,7) | 45 (25) | 85 (50) | 145 (85) | 260 (155) | 360 (210) | 590 (345) |
| | Max (185 m/s) | 105 (3,6) | 50 (29,4) | 90 (50) | 175 (100) | 290 (170) | 525 (305) | 720 (425) | 1185 (695) |
| | High-Speed (224 m/s) | 130 (4,5) | 60 (35,3) | 105 (60) | 210 (125) | 350 (205) | 635 (370) | 875 (515) | 1430 (840) |
| | | | | | | | | | |
| **Nitrogen (N2)** | Low-Speed (50 m/s) | 25 (0,9) | 205 Nl/min (7,2) | 20 (13) | 40 (25) | 70 (40) | 130 (75) | 180 (105) | 295 (175) |
| | Standard (92,7 m/s) | 50 (1,5) | 20 (11,7) | 40 (20) | 80 (45) | 135 (75) | 240 (140) | 335 (195) | 550 (320) |
| | Max (185 m/s) | 100 (3,3) | 45 (26,4) | 80 (45) | 160 (95) | 270 (155) | 485 (285) | 670 (395) | 1100 (645) |
| | High-Speed (224 m/s) | 120 (4,2) | 55 (32,3) | 100 (55) | 195 (115) | 325 (190) | 590 (345) | 815 (475) | 1330 (780) |
| | | | | | | | | | |
| **Oxygen (O2)** | Low-Speed (50 m/s) | 25 (0,9) | 215 Nl/min (7,5) | 20 (13) | 45 (25) | 75 (40) | 135 (80) | 185 (110) | 305 (180) |
| | Standard (92,7 m/s) | 50 (1,8) | 20 (11,7) | 40 (25) | 80 (45) | 140 (80) | 250 (145) | 345 (205) | 570 (335) |
| | Max (185 m/s) | 100 (3,6) | 45 (26,4) | 85 (50) | 165 (95) | 280 (165) | 505 (295) | 695 (410) | 1140 (670) |
| | High-Speed (224 m/s) | 125 (4,2) | 55 (32,3) | 105 (60) | 205 (120) | 340 (200) | 610 (360) | 845 (495) | 1380 (810) |
| | | | | | | | | | |
| **Nitrous oxide (N2O)** | Low-Speed (50 m/s) | 25 (0,9) | 220 Nl/min (7,7) | 20 (14) | 45 (25) | 75 (45) | 140 (80) | 190 (110) | 315 (185) |
| | Standard (92,7 m/s) | 50 (1,8) | 20 (11,7) | 40 (25) | 85 (50) | 140 (85) | 260 (150) | 355 (210) | 585 (345) |
| | Max (185 m/s) | 105 (3,6) | 45 (26,4) | 85 (50) | 170 (100) | 285 (170) | 520 (305) | 715 (420) | 1170 (690) |
| | High-Speed (224 m/s) | 125 (4,5) | 60 (35,3) | 105 (60) | 210 (120) | 345 (205) | 630 (370) | 865 (510) | 1420 (835) |

## SAFELY DIMENSIONED FOR EVERY APPLICATION

Whether for low consumption, standard applications or high flow rates:

The various measuring range options allow the VA 526 to be optimally configured for pipe size, gas type and maximum flow rate.

# MORE NEW PRODUCTS

## LC 600 - LeakCam - Leak detector



· "Power Beam Forming" sets new standards in leak detection

· Only 64 microphones are needed to achieve unique dynamics and sensitivity


· With Power Beam Forming, several sound sources can be recognized simultaneously, even if they are at different volumes

· Precise leak detection from a large distance with acoustic zoom

· With the "acoustic zoom" of the LeakCam 600, leaks can be precisely localized from great distances by focusing ultrasonic noises even more strongly

· Laser distance module for precise determination of the leak rate in l/min and the costs in Euro

## CMM 500 - Compressor Master Meter



· Precision Redefined: Accuracy < 0.5%

· Flow measurement with Venturi tube manufactured according to ISO 5167-3

· Reference measuring device for compressor test benches

· Measurement on the „wet side“ directly behind the compressor

· High-precision measurement of the volume of compressed air supplied to third parties for billing purposes

## OIL CHECK 500 - Measurement of the vapor oil content




· Patented „Forced Pressure Variation“ method for long-term stable measurement results

· 24/7 online monitoring: recognizes an increase of the oil content long before damage occurs

· The sensor unit can be replaced by the customer on site. This eliminates the need to return the entire device for recalibration

· Can be used in compressed air, nitrogen, argon, helium and hydrogen

## FA 500 - Dew point sensor with display




· Monitoring of refrigeration, membrane and adsorption dryers

· Residual moisture measurement in gases such as N2, O2, etc

· Wide measuring range from -80 to +20 °Ctd

· The integrated buttons allow simple, menu-guided operation

· Analogue output, Modbus RTU and alarm output, optional M-Bus or Ethernet

· Pressure-resistant up to 500 bar (special version)

· New: Optional integrated pressure measurement up to 30 bar

CS INSTRUMENTS WORLDWIDE

Headquarters Germany

GERMANY


CS INSTRUMENTS GmbH & Co. KG
Zindelsteiner Straße 15
78052 VS-Tannheim
Germany
P.: +49 (0)7705 978 99-0
F: +49 (0)7705 978 99-20
E-Mail: info@cs-instruments.com
Web.: www.cs-instruments.com

CS INSTRUMENTS GmbH & Co. KG
Gewerbehof 14
24955 Harrislee
Germany
P.: +49 (0)461 807 150-0
F: +49 (0)461 807 150-15
E-Mail: info@cs-instruments.com
Web.: www.cs-instruments.com


Subsidiaries of CS INSTRUMENTS


AUSTRIA
CS INSTRUMENTS GmbH
Grazer Straße 8
8605 Kapfenberg
Austria
P.: +43 (0) 3862 54 0 67
E-Mail: a.sieberer@cs-instruments.at
Web.: www.cs-instruments.com/at

NETHERLAND / BELGIUM
CS INSTRUMENTS BENELUX BV
Bakboordlaan 30
3448 KG Woerden
Netherland
P.NL: +31 642 87 79 76
P.BE: +32 484 57 59 50
E-Mail: info@cs-instruments.nl
Web.: www.cs-instruments.com/nl

SWITZERLAND
CS INSTRUMENTS (Schweiz) GmbH
Mühlegasse 8
3237 Brüttelen
Switzerland
P.: +41 32 355 4160
E-Mail: info@cs-instruments.ch
Web.: www.cs-instruments.com/ch

CHINA
CS INSTRUMENTS (Shanghai) Co.;Ltd
Room 508,JT1166, No. 1080, Moyu South Road
Anting Town, Jiading District
200003, Shanghai, China
P.: +86 13601694498
E-Mail: k.wu@cs-instruments.cn
Web.: www.cs-instruments.com/zh

SOUTH AFRICA
CS INSTRUMENTS (Pty) Ltd.
142 Briza Road, Table View
7441 Cape Town
South Africa
P.: +27 (0)21 557 56 18
E-Mail: info@cs-instruments.co.za
Web.: www.cs-instruments.com/za

TURKEY
CS INSTRUMENTS Ölçüm Ekipmanları Tic. Ltd. Şti.
Yeşilbağlar Mah. D-100 Bulv.
Pendik Pera Residence A Blok No: 20K
34893 Pendik İstanbul, Turkey
P.: +90 216 755 10 20
E-Mail: info@cs-instruments.com.tr
Web.: www.cs-instruments.com/tr

FRANCE
CS INSTRUMENTS
72, boulevard Berthier
75017 Paris
France
P.: +33 1 86 95 87 60
E-Mail: info@cs-instruments.fr
Web.: www.cs-instruments.com/fr

SPAIN
CS INSTRUMENTS, S.L.
Avda. Cerro Milano 4, Local 1
28051 Madrid
Spain
P.: +34 91 33 15 758
E-Mail: info@csinstruments.es
Web.: www.cs-instruments.com/es

USA
CS INSTRUMENTS USA INC.
110 Traders Cross
Bluffton, SC 29909
USA
P US Toll-free: (833) 319 1010
P International: +1 (843) 599 6700
E-Mail: info-us@cs-instruments.com
Web.: www.cs-instruments.com/us

ITALY
CS INSTRUMENTS Italia S.r.l.
Via Matteotti 66
20092 - Cinisello Balsamo (Mi)
Italy
P.: +39 0225061761
E-Mail: info@cs-instruments.it
Web.: www.cs-instruments.com/it

SWEDEN / NORWAY
CS INSTRUMENTS Scandinavia AB
Hovlanda 30
471 93 Kållekärr
Sweden
P.: +46 304 66 84 50
E-Mail: a.ahs@cs-instruments.se
Web.: www.cs-instruments.com/se

INDONESIA
PT.CSInstruments Indonesia Abadi
Jalan raya bojong nangka,
Ruko Podomoro city block B2 No 26
Jawa Barat 16963
Indonesia
P.: +62 812-1888-5324
E-Mail: g.rufiyanto@csinstruments.com
Web.: www.cs-instruments.com

INDIA
CS INSTRUMENTS INDIA PRIVATE LIMITED
27 – 28, Heera Panna Market, Pur Road
BHILWARA - 311001 (Rajasthan)
India
P.: +91 98294 19901
E-Mail: s.jevlia@cs-instruments.com
Web.: www.cs-instruments.com

POLAND
CS INSTRUMENTS Polska Sp. z o.o.
Zgierska 142/201
91-320 Lodz
Poland
P.: +48 662 605 486
E-Mail: a.florczak@cs-instruments.com
Web.: www.cs-instruments.com/pl



บริษัท เอ็นเทค อินดัสเทรียล โซลูชั่น จำกัด
17/121 ซอยงามวงศ์วาน 47 แยก 48 แขวงทุ่งสองห้อง เขตหลักสี่ กรุงเทพฯ 10210
Tel : 0-2779-8888 Email : info@entech.co.th Line : @entech
www.entech.co.th
@entech
ENTECH
Where Solutions Begin